




Dilution system ejector for the PMP application with dilution factor 1:100

Description

The PMPD 100 dilution system is a dilution system according to the ejector principle that was especially developed for the PMP application or the PMP measurement chain. The PMPD 100 achieves a dilution factor of 1:1000 (see Figure 1) by means of a thermodiluter up to 200°C.

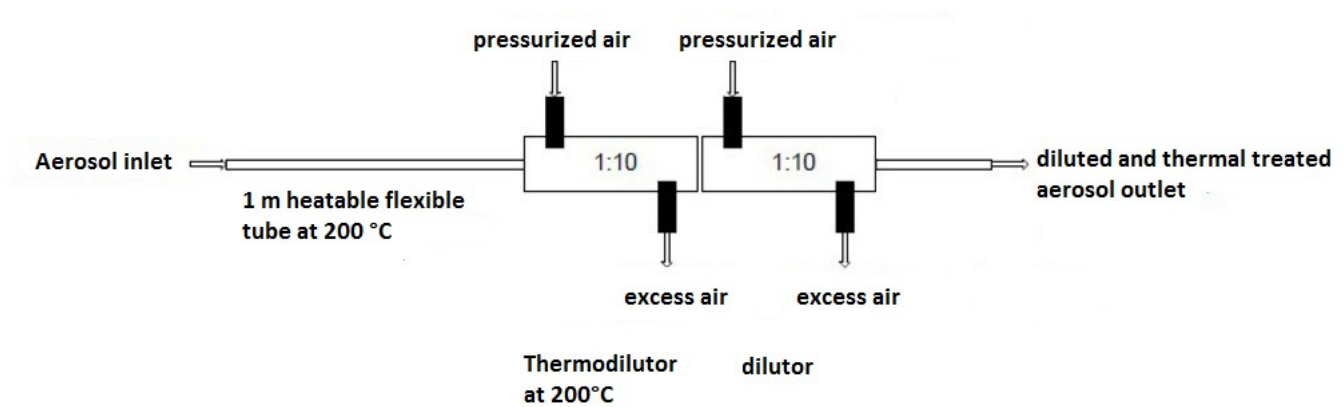

nbsp

Fig. 1: PMPD 100

The PMPD dilution systems offer all the advantages of the other Palas® product series of ejector diluters, e.g. a temporally constant dilution factor.

The suitability of the PMPD 100 for the PMP measurement chain was confirmed at the METAS Institute in Switzerland (see [measurement report no. 235-10383¹](#)).

Representative dilution of particle size distribution of the Palas® dilution systems by cascading

VDI report no. 1973 from 2007 proved metrologically that a reproducible aerosol dilution is possible with the Palas® dilution systems down to V_F 100,000.

¹measurement report no. 235-10383: <https://www.palas.de/en//file/1j1381/application/pdf/Masurement+Report+No+235-10383+PMPD+100.pdf>

Type	Dilution factor* V_f	Pressure - resistant up to 10 bar	Chemically resistant	Heatable up ... °C	dp_{max} in μm	Compressed air 4 – 8 bar	Cascadable	Voltage
DC 100	10, 100				< 5			115 V / 230 V
DC 1000	10, 100, 1000				< 5			115 V / 230 V
DC 10000	10, 100, 1000, 10000				< 5			115V / 230 V
KHG 10	10		x	150	< 20	x	x	115 V / 230 V
KHG 10 D	10	x	x	150	< 20	x	x	115 V / 230 V
PMPD 100	100		x	200	< 5	x		115 V / 230 V
PMPD 1000	1000		x	200	< 5	x		115 V / 230 V
VDD 10	1 – 10				< 10	x		115 V / 230 V
VKL 10	10				< 20	x	x	
VKL 10 E	10		x		< 20	x	x	
VKL 10 ED	10	x	x		< 20	x	x	
VKL 10 V	10				< 20	x	x	
VKL 27	27				< 10	x	x	
VKL 100	100				< 2	x	x	

*Other dilution factors on request

Table 1: Technical characteristics of Palas® dilution systems

Benefits

- The dilution systems from Palas® are characterized unambiguously. This is documented with a calibration certificate for each individual device.
- The dilution steps for the PMPD series deliver a temporally constant, representative dilution with the factors 100 and 1000.
- Low compressed air consumption (e.g. just 96 l/min. for a dilution factor of 1000 with four VKL 10 systems)
- The dilution steps are combinable with all common particle counters.

Datasheet

<i>Parameter</i>	<i>Description</i>
Power supply	115 - 230 V, 50 - 60 Hz
Dilution factor	1 : 100
Isokinetic suction nozzles	2 - 5 l/min
Maximum particle size	< 10 μm
Special features	Evaporation of volatile elements for exhaust emission measurements according to VPR Calibration Procedure AEA/ED 47382/Issue 5 (Volatile Particle Removal Efficiency), chemical resistant, heated to 200 °C
Thermodynamic conditions for dilution	400°C
Volume flow (clean air)	36 - 90 l/min (heated to 200 °C)
Volume flow (suction flow)	2 - 5 l/min
Compressed air supply	4 - 8 bar

Applications

Dilution system for PMP measurement chain

Palas GmbH
Partikel- und Lasermesstechnik
Greschbachstrasse 3 b
76229 Karlsruhe
Germany

Managing Partner:
Dr.-Ing. Maximilian Weiß, Udo Fuchslocher
Commercial Register:
register court: Mannheim
company registration number: HRB 103813
USt-Id: DE143585902



Contact: E-Mail: mail@palas.de Internet: www.palas.de Tel: +49 (0)721 96213-0 Fax: +49 (0)721 96213-33